


SI 1011 Series

10000VA

Double conversion

Online UPS

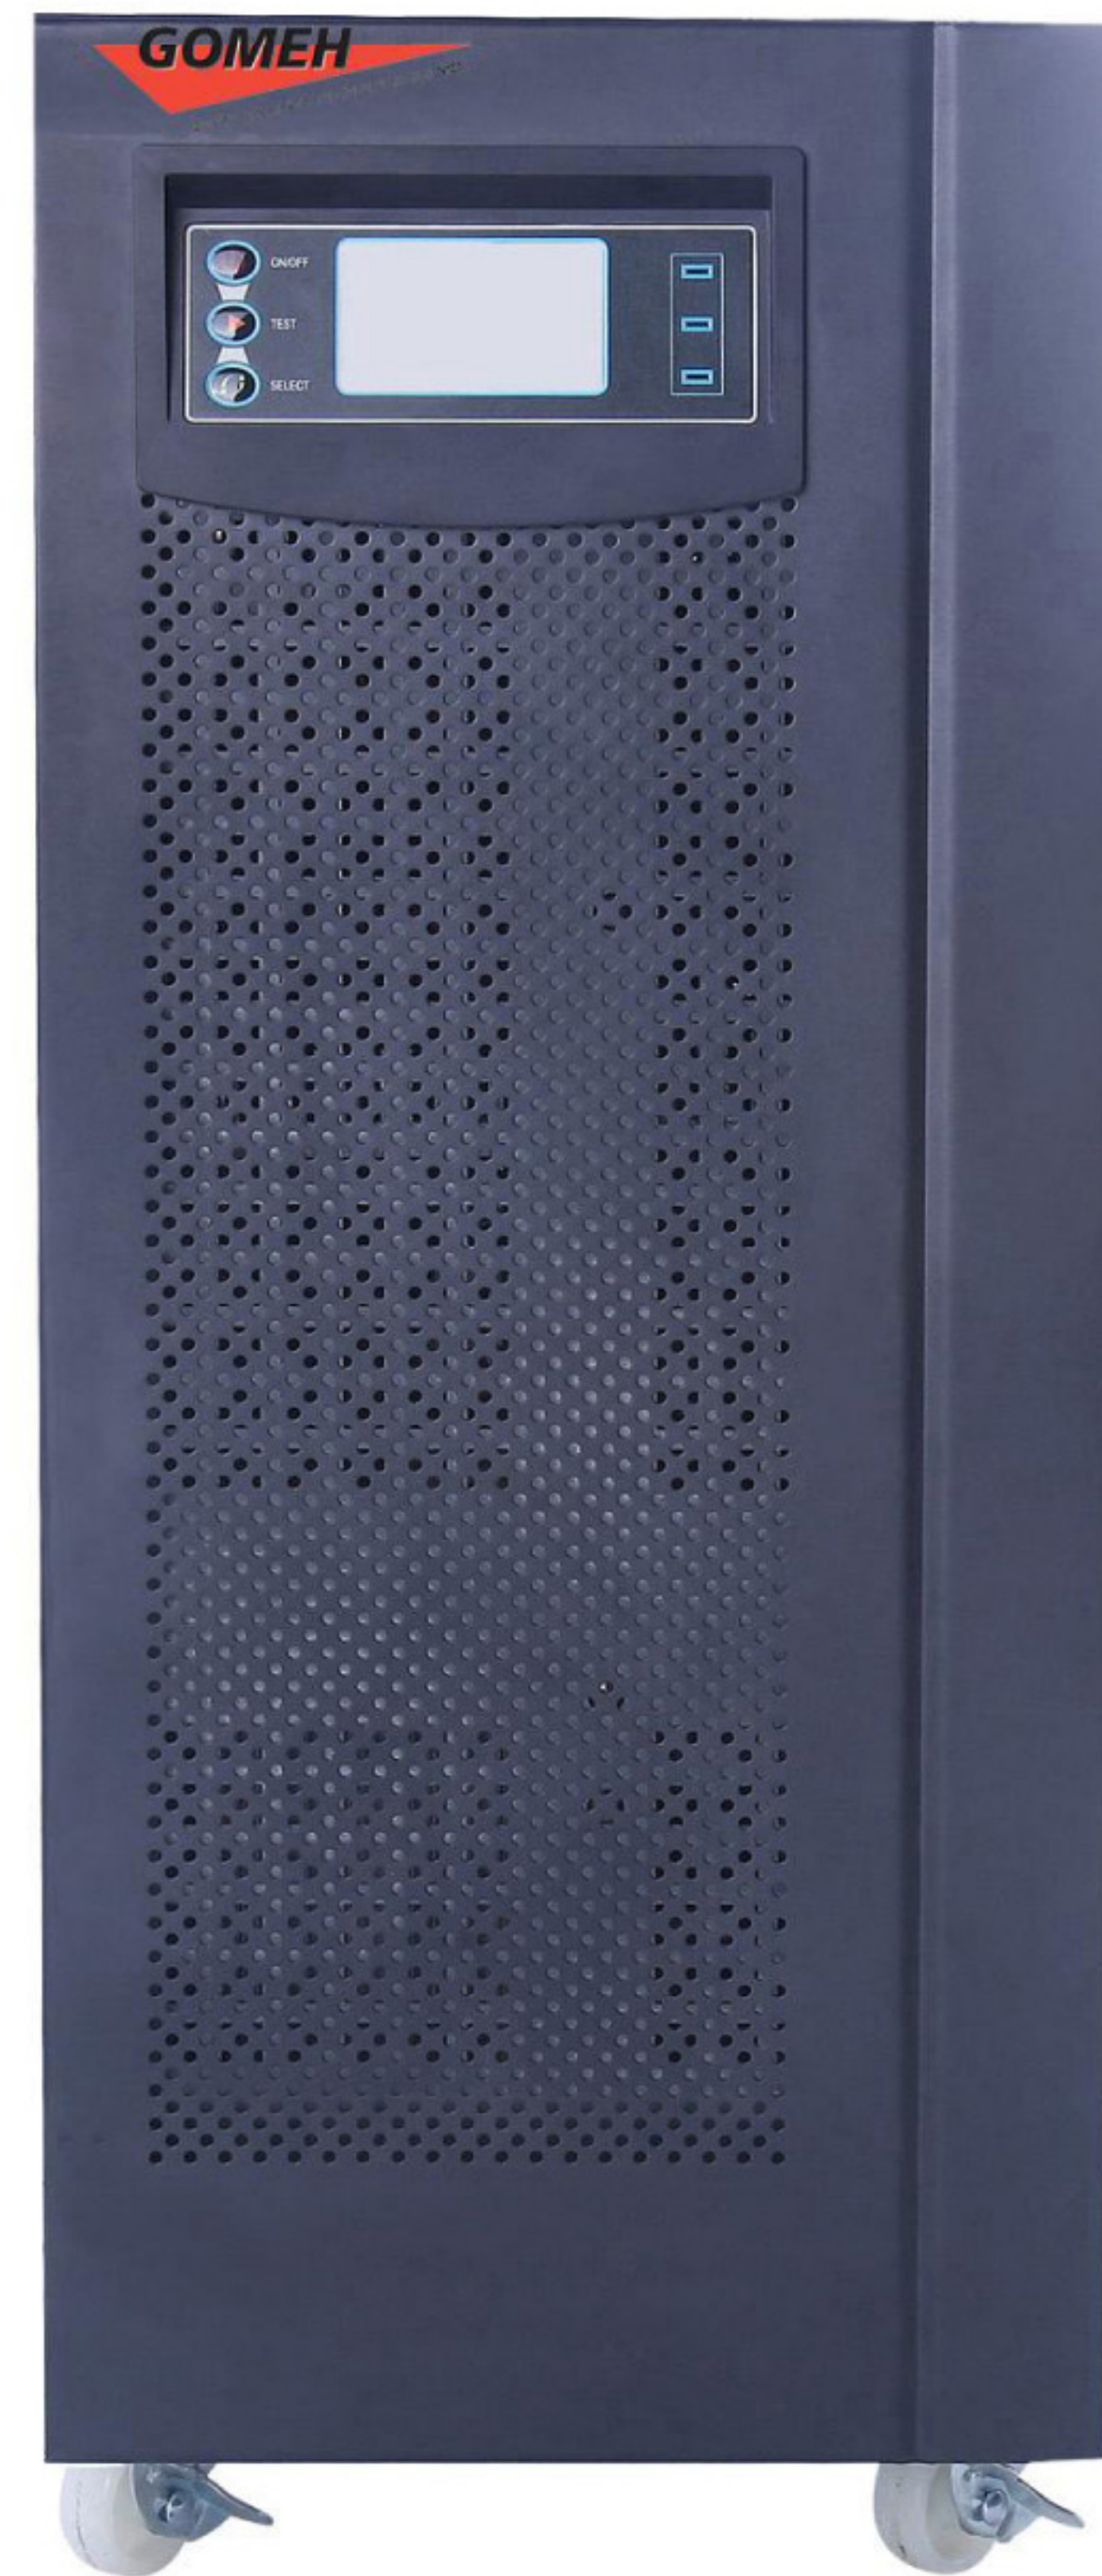


Characters:

- Non transfer time of of output
- Pure sine-wave output
- N+X parallel capacity
- Large LCD
- Microprocessor control, self-check, battery check by itself
- Cold Start (PC)
- Fault record
- Online static bypass, strong protection for overload and UPS fault
- RS232 & SNMP for optional, to provide remote control management
- Intelligent temperature controlled fan, long life and low noise
- Intelligent economical working mode
- MTBF is more than 300,000 hours, and MTTR is 30 minutes
- Wide voltage range
- Fully digital control technology

Application:

- Home PC
- Sever, bank
- IT equipment
- Communication system
- Network
- Supermarket , ATM

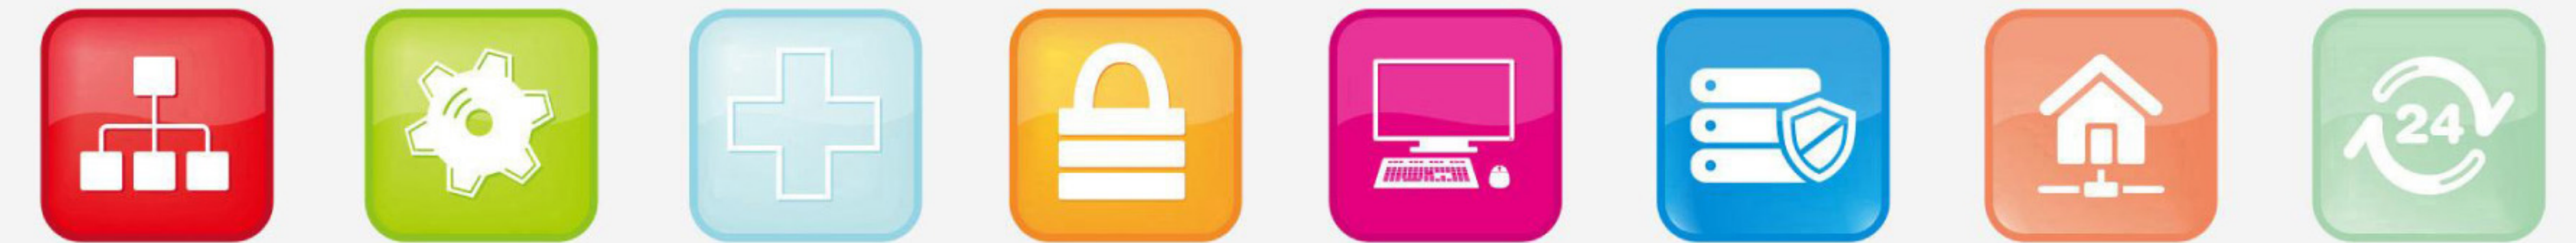

Parameters

Mode		SI 1011
Capacity		10000VA N + X Parallel (up to 3 pcs)
Input	Voltage	120VAC-275VAC 11000JOUl (MAX)
	Frequency	45-55Hz (55-65Hz) Auto sensing
	Input Power Factor	>99%
Output	Voltage	230 VAC ± 1%
	Frequency	50 / 60Hz ± 0.2% (battery mode)
	Distortion THD	Non-linear Load THD < 5% ; Linear Load THD < 3%
	Overload	105%-125% 1min, 125%-150% 30s, > 150% 0.5s
	Crest Factor	> 3:1
	Output Power Factor	0.8 LAG
	Efficiency	>91%
	Dynamic Response	Full Load ± 3%
Wave Form	Sine Wave	
Battery	Type	Valve Controlled Sealed Lead-acid Battery
	DC Voltage	192VDC/240VDC
	Quantity for Battery	12V / 7Ah × 16 (pcs) / 12V / 7Ah × 20 (pcs)
	Charging current	2A/4A 8A(optional)
Transfer Time	AC Fault	0ms
	UPS Fault	0ms
Protection	Short Circuit	Shut Off Inverter and Bypass Output at The Same Time
	Over Temperatruue	Transfer to Bypass Output Automatically
Display	LCD	Input Voltage、 Output Voltage、 Current、 Frequency、 Battery Voltage & Charging Current、 Fault、 Alarm
	LED	UPS Status
Alarm	Battery Low Voltage	Alarm Every Second
	AC Fault	Alarm Every 4 Seconds
	UPS Overload	Alarm Continuely
	UPS Fault	Alarm Continuely
Communication Interface		RS232 (SNMP optional)
Environ-ment	Temperature	0°C-40°C
	Humidity	≤90%
	Noise (within 1 meter)	<50dB
Weight (Net Weight)		21kg/59kg
Dimension W×D×H (mm) for UPS		248*500*616